

AP212

The AP212 water filter system reduces sediment, dirt, rust and improves taste & odour for the whole house.

The AP212 compliments and assists other filtration systems used for cyst protection.

The unit is sized to provide flow rates up to 30 litres per minute and should only be used in cold water. To provide for easier cartridge replacement a 3/4" isolating valve is already fitted.

Full instruction and warranty details are provided with the system. The AP212 filter system uses Aqua Pure replacement filter cartridges.



drinking water filter systems for great tasting water & cyst protection

model no. AP8000

premium water filter system

reduction of particles down to 0.5 micron (nominal)

- Provides effective reduction of sediment, turbidity, offensive taste/odour, chlorine, organic matter and all other particulate matter down to 0.5 micron (nominal) in size.
- Protection from parasitic cysts such as giardia & cryptosporidium.
- Neat, compact and versatile design.
- Supplied complete with all necessary plumbing fittings for simple and quick installation.
- Cartridge replacement is as quick and easy as changing a light globe.



model No. AP2200C

twin cartridge water filter system

reduction of particles down to 0.5 micron (nominal)

- Provides effective reduction of sediment, turbidity, offensive taste/odour, chlorine, organic matter and all other particulate matter down to 0.5 micron (nominal) in size.
- Supplied complete with all necessary plumbing fittings for simple and quick installation.
- Easy to install.
- Twin system for higher capacity applications.



Housings comply with
Australian Standards
AS/NZS 3497

Aqua-Pure[®]
WATER PURIFIERS

Cuno Pacific Pty Ltd

CUNOCare 1300 FILTER
3 4 5 8 3 7



cunoau@mmm.com
www.cuno.com.au



1800 671 599

NEW ZEALAND: 3M New Zealand Ltd

Phone: 09 444 4760 Fax: (09) 444 2773

email: innovation@nz.mmm.com web: www.3m.com/nz



**Quality
Endorsed
Company**
ISO 9001 Lic 3937
SAI Global

Manufactured under
a quality system
certified as
complying with
ISO 9001 by an
accredited
certification body

Aqua-Pure[®]

WATER PURIFIERS

whole of house water filter system



3year
warranty^{*}
*excludes cartridges

reduces
sediment • dirt & rust • taste & odour • allergens

(061)
29-APLIT212

features

- The AP212 whole house filter system is complete with dirt/rust and taste/odour cartridges, ready to use immediately
- Unrestricted flow design and 3/4" connection provides a flow rate of up to 30 lpm with incoming pressure of 700kPa or greater
- The AP212 is designed, fully assembled and tested in Australia

benefits

- Provides clean, clear water throughout the whole house. A must for all new and existing homes
- Reduces taste/odour, chlorine, allergens and organic matter. Improving the quality of water used for drinking, cooking, bathing and washing
- Protects household plumbing and extends the life of faucets, hot water services and appliances by removing abrasive dirt, rust and sediment
- Easy to install, complete with isolating valve
- Three year warranty

replacement cartridges

for filter housing #1

Model No. AP110

Aqua Pure graded density for dirt/rust reduction.

- Made by an exclusive process from pure white cellulose fibres.
- Graded from outer to inside of core for depth filtration increasing dirt holding capacity and life.
- Clean filtered water from the AP110 filter cartridge flows up the centre hole to the AP117 taste/odour filter cartridges.
- One (1) of these filter cartridges are required to be fitted into housing #1 of the AP212 system.



for filter housing #2

Model No. AP117

Aqua Pure graded density for taste/odour reduction.

- Heat sealed 'no mess' carbon filter cartridge.
- Built-in, 5 micron (nominal) prefilter and postfilter.
- Interchangeable in all existing single and multi-cartridge filter housings.
- Aqua Pure activated carbon filter cartridges reduce chlorine, colour, odours, organics and turbidity from water. The easy-to-change throwaway filter cartridge contains approx. 540cm³ of premium quality hard granular activated carbon.
- Two (2) of these filter cartridges are required to be fitted into housing #2 of the AP212 system.




specifications

Micron	5 (nominal)
Height	9 ³ / ₄ " (248mm)
Max. Temp	40°C

specifications

Micron	5 (nominal)
Height	9 ³ / ₄ " (248mm)
Max. Temp	40°C

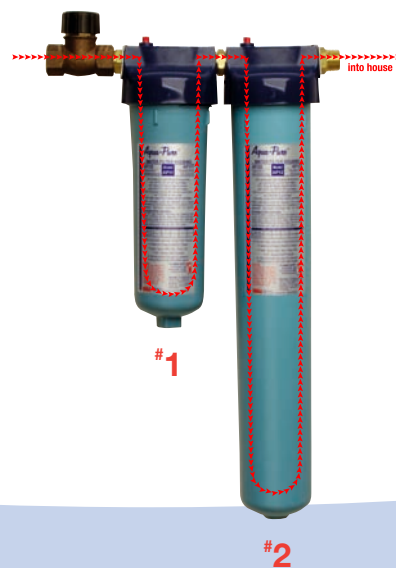

installation

The Aqua Pure AP212 is designed to be installed on the main water line after the garden tap, prior to entering the house.

The unit is designed for pipework to enter on the left hand side of the system. (pipework may have to be modified to facilitate such fitting)

The system is supplied with a complete set of filter cartridges.

Essential installation note: The AP212 is designed for use on microbiologically safe water only. Allow a minimum of 50mm gap under the sump for cartridge replacement. A certified dual check valve should be installed in conjunction with a 500kPa pressure limiting valve (*not included*), should the mains pressure exceed 900kPa (130psi).

product specifications

Part no.	110465-00
Micron	5 (nominal)
Height	620mm
Width	350mm
Inlet connection size	3/4" BSPF
Outlet connection size	3/4" BSPM
Max. Flow Rate	30 lpm
Max. Pressure	900 kPa (130psi)
Max. Temperature	40°C

AP212

CUNOCare 1300 FILTER
3 4 5 8 3 7

cunoau@mmm.com www.cuno.com.au